

# STARMAX



**MR** MARINE AND RV  
MOTIVE DEEP CYCLE AGM  
**BATTERIES**

SDC12-85-G24-DT(12 Volts)



[www.starmaxbatteries.com](http://www.starmaxbatteries.com)


The world's leading battery brand

# SDC SERIES - SUPERIOR CYCLING NON SPILLABLE

## 24DC-AGM



### LAYOUT

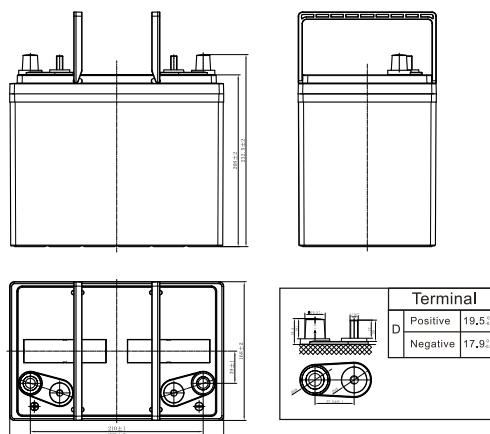

## General Features

### ✓ Stable initial capacity

- PAM/NAM amount optimization
- 4BS crystal paste mixing & curing technology
- Double layer separator technology
- Improved design electrolyte S.G.

### ✓ Excellent deep cycle performance

- Plate assembly pressure re-engineering
- New PAM/NAM recipe introduced
- Gel electrolyte technology
- Rare earth alloy
- Double layer separator technology
- Lower acid filling temperature

### ✓ Solve NAM sulphation

- Carbon boost technology
- Pre-sulfate technology

### ✓ Improved PSoC cycling

- Carbon boost technology
- Mix carbon boost technology
- Targeting for higher level through carbon technology

### ✓ Less water loss

- PAM/NAM amount optimization
- New PAM/NAM recipe introduced
- Rare earth alloy

### ✓ Delay PAM softening and shedding

- Plate assembly pressure re-engineering
- 4BS crystal paste mixing & curing technology
- Higher paste density

### ✓ Optimize electrolyte stratification

- Introduce AGM-GEL technology



# SPECIFICATIONS


Voltage	12V	
Dimension	Length	260mm(10.2 inches)
	Width	168mm(6.61 inches)
	Container height	208mm(8.19 inches)
	Total Height	232mm (9.15 inches)
Approx Weight	23.4kg (51.6) lbs	
Terminal	DT (5/16")	
Container Material	AB	
Reserve Capacity	25A	150min
	75A	35 min
Capacity	20HR	85Ah
	10HR	78Ah
	5HR	73Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)

## Applications


- ✓ Aerial Work Platforms
- ✓ Golf cart & Utility Vehicles
- ✓ Transportation
- ✓ Floor Cleaning Machines
- ✓ Marine & Recreation Vehicles
- ✓ Solar & Renewable Energy



## Charging Profiles

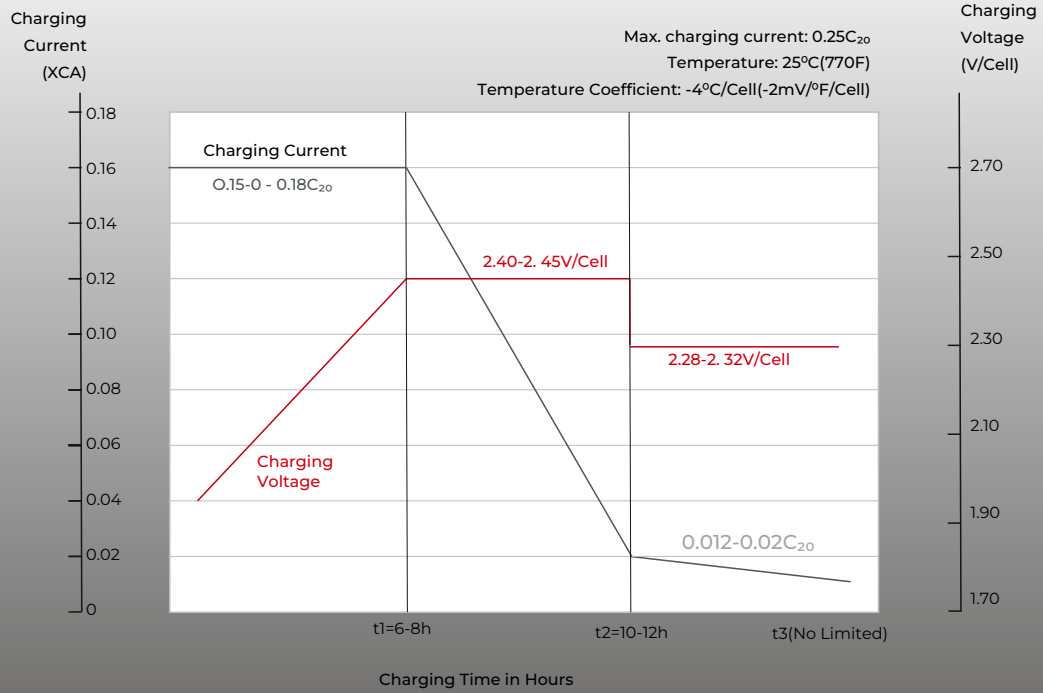


## Cycle Life in Relation to Depth Of Discharges

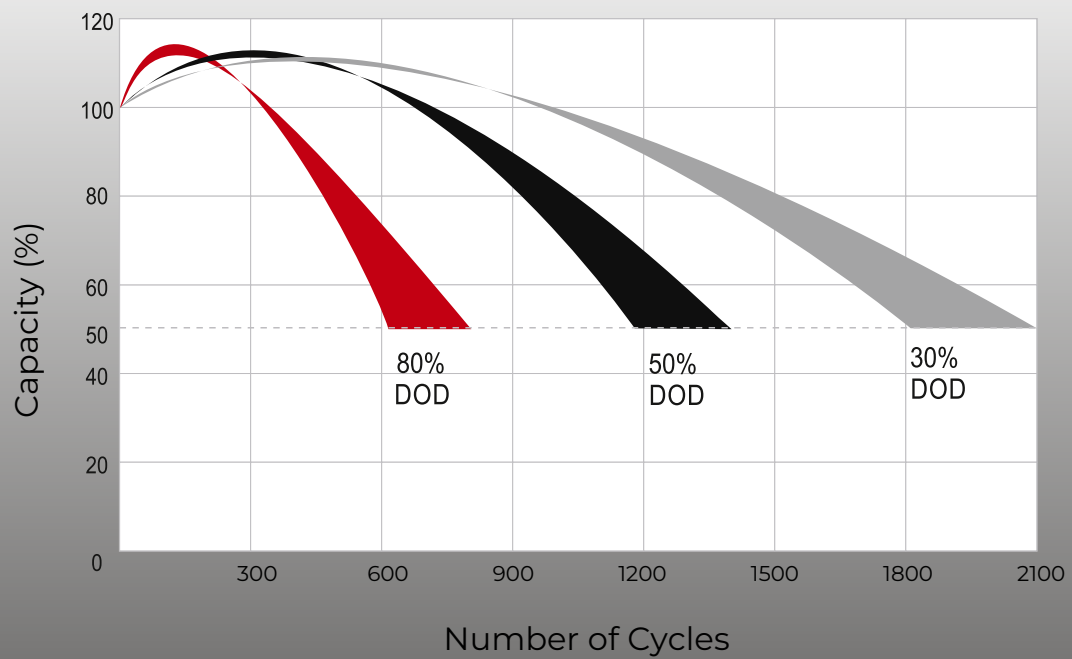


## Relationship of OCV and State of Charge

(25°C, 77°F)

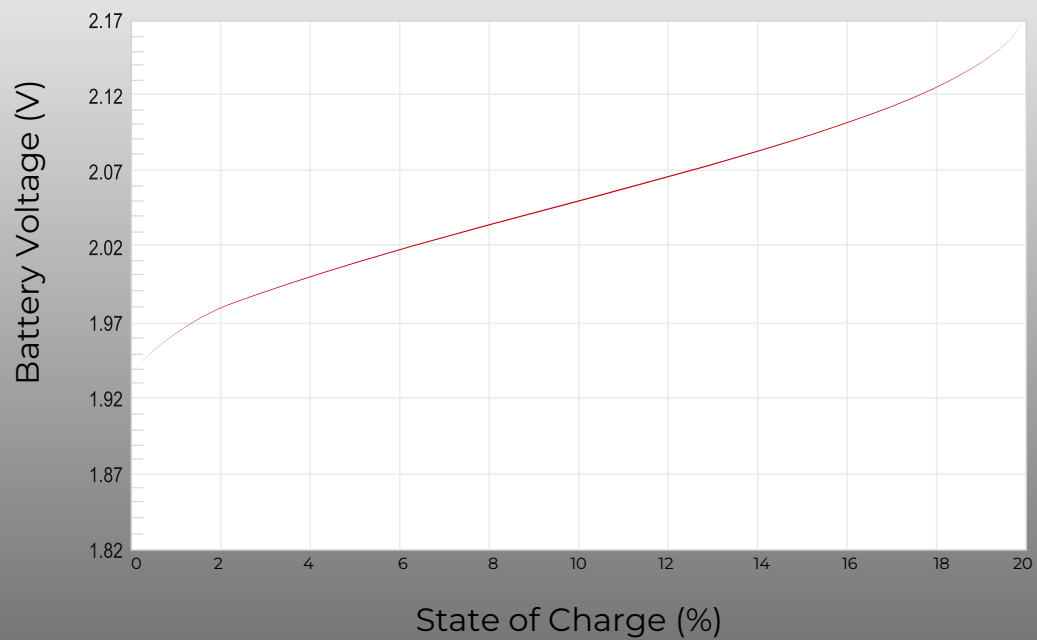

## Self Discharge Characteristics

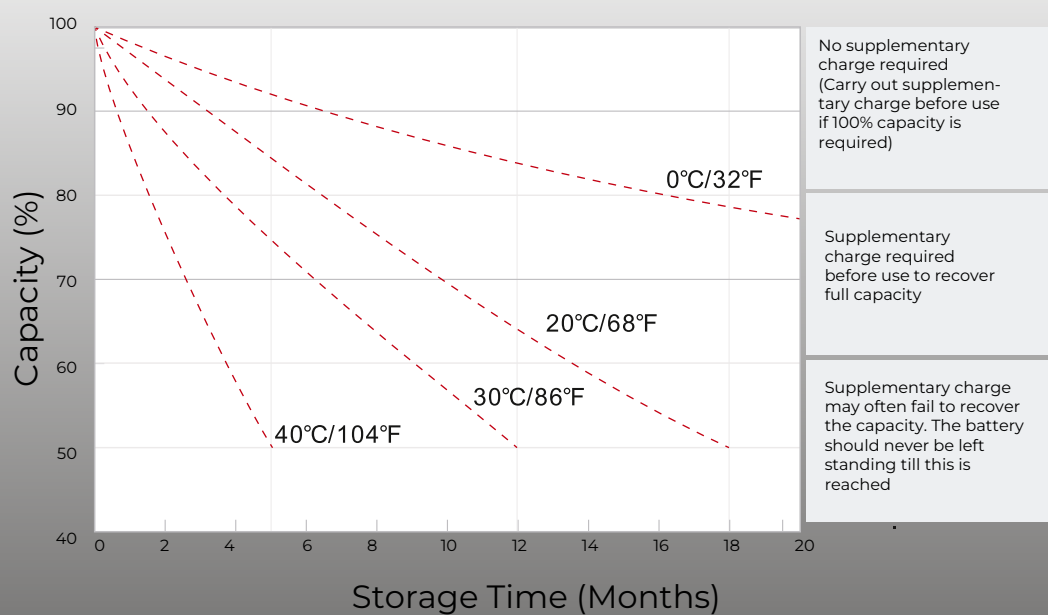

The max Storage time should not be above 15 months



**Starmax Corporation**

1585 Cliveden Avenue, Delta, British Columbia  
V3M 6M1, Canada

**Phone:** +1 888 669 1310

**Email:** [info@starmaxbatteries.com](mailto:info@starmaxbatteries.com)

**Website:** [www.starmaxbatteries.com](http://www.starmaxbatteries.com)

