

# STARMAX



GOLF / UTILITY VEHICLES

## MOTIVE DEEP CYCLE AGM BATTERIES

SDC6-265-GC2 (6volts)




[www.starmaxbatteries.com](http://www.starmaxbatteries.com)

# SDC SERIES - SUPERIOR CYCLING NON SPILLABLE

6V 265Ah



## LAYOUT

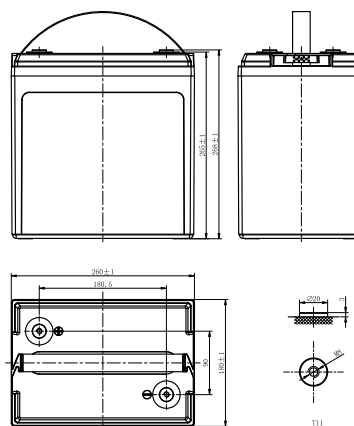

## General Features



### Stable initial capacity

- PAM/NAM amount optimization
- 4BS crystal paste mixing & curing technology
- Double layer separator technology
- Improved design electrolyte S.G.



### Excellent deep cycle performance

- Plate assembly pressure re-engineering
- New PAM/NAM recipe introduced
- Gel electrolyte technology
- Rare earth alloy
- Double layer separator technology
- Lower acid filling temperature



### Solve NAM sulphation

- Carbon boost technology
- Pre-sulfate technology



### Improved PSoC cycling

- Carbon boost technology
- Mix carbon boost technology
- Targeting for higher level through carbon technology



### Less water loss

- PAM/NAM amount optimization
- New PAM/NAM recipe introduced
- Rare earth alloy



### Delay PAM softening and shedding

- Plate assembly pressure re-engineering
- 4BS crystal paste mixing & curing technology
- Higher paste density



### Optimize electrolyte stratification

- Introduce AGM-GEL technology




# SPECIFICATIONS

Voltage		6V	
Dimension	Length	260mm(10.2 inches)	
	Width	180mm(7.09 inches)	
	Container height	263mm(10.4 inches)	
	Total Height	268mm (10.6 inches)	
Approx Weight		32.9kg (72.5) lbs	
Terminal		T11(M8)	
Container Material		ABS	
Reserve Capacity		25A	620min
		75A	165 min
Capacity		20HR	268Ah
		10HR	240Ah
		5HR	220Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)	
	Charge	0~40°C (32~104°F)	
	Storage	-15~40°C (5~104°F)	


## Applications

- ✓ Arial Work Platforms
- ✓ Golf cart & Utility Vehicles
- ✓ Transportation
- ✓ Floor Cleaning Machines
- ✓ Marine & Recreation Vehicles
- ✓ Solar & Renewable Energy

## Charging Profiles

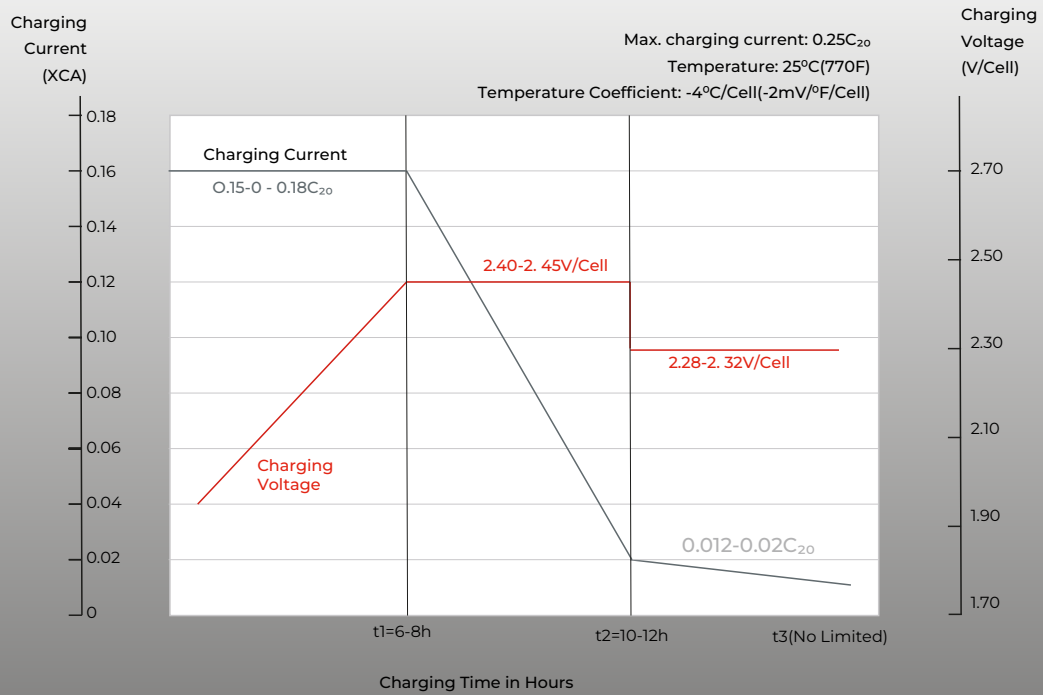


## Cycle Life in Relation to Depth Of Discharges

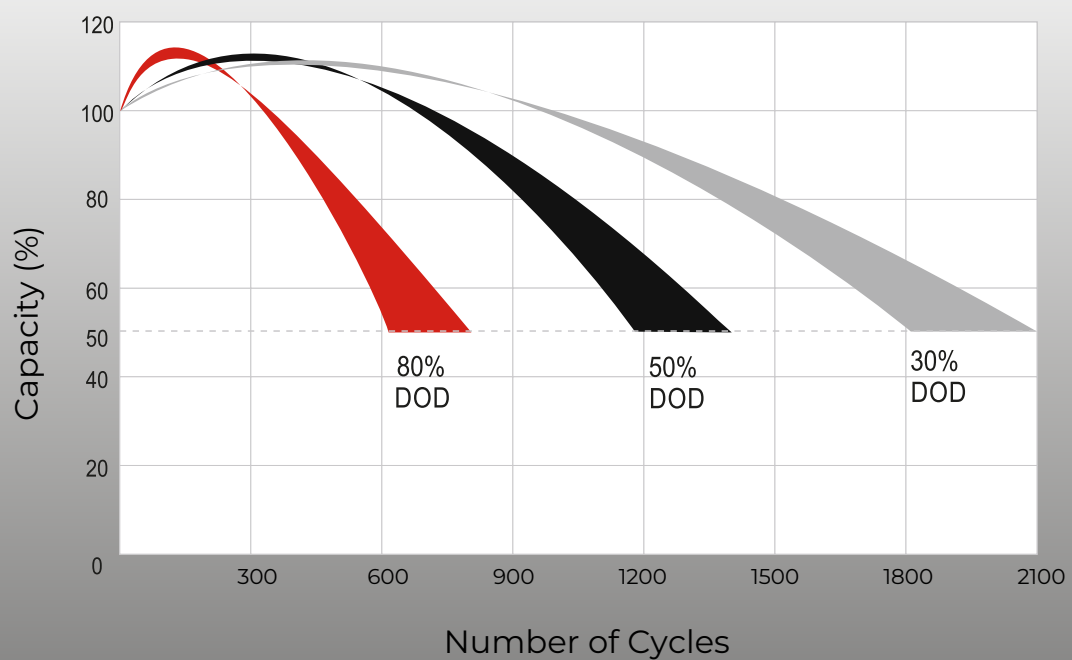




## Relationship of OCV and State of Charge

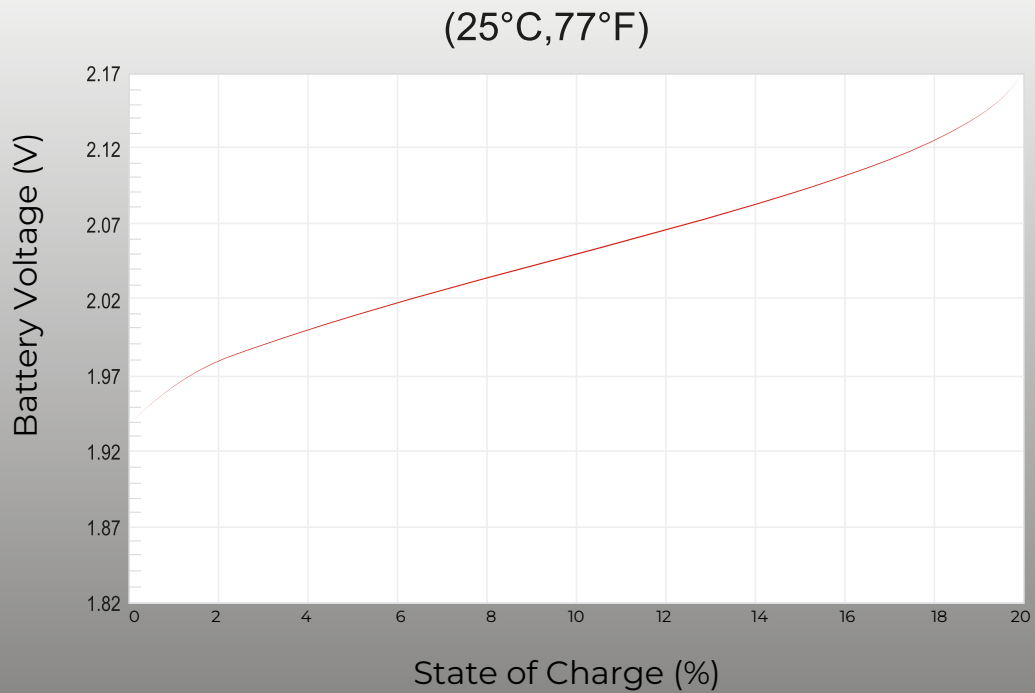

## Self Discharge Characteristics

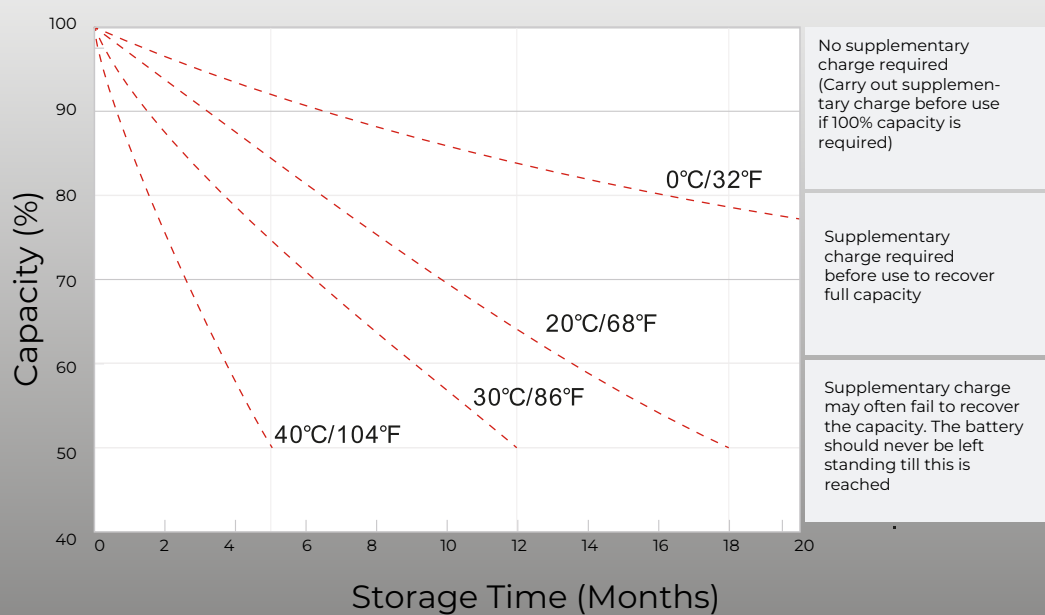

The max Storage time should not be above 15 months



**Starmax Corporation**

1585 Cliveden Avenue, Delta, British Columbia  
V3M 6M1, Canada

**Phone:** +1 888 669 1310

**Email:** [info@starmaxbatteries.com](mailto:info@starmaxbatteries.com)

**Website:** [www.starmaxbatteries.com](http://www.starmaxbatteries.com)

